

SM915ATI



PROFESSIONAL SWING ARM TIRE CHANGER


SM915ATI TIRE CHANGER
is designed especially to handle
tough to change tires, like low
profiles and run flats in a high
performance service shop.




CEMB[®] USA

SM915ATI

- Clamping of rims from 10" to 28"
- PRESS ARM (optional) for low profile tires

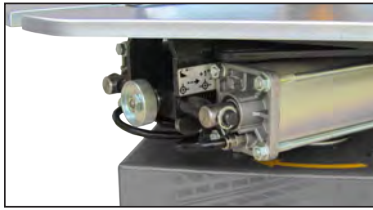

- ADJUSTABLE TABLE with inflators on each clamp

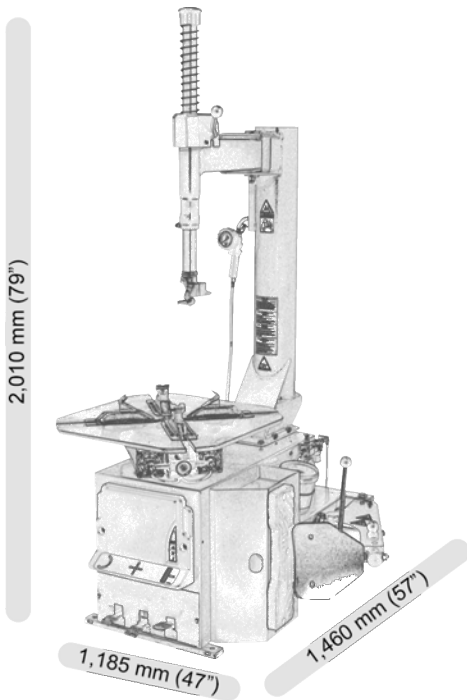

- Made in Italy
- Semi-automatic SWING ARM
- Air tank in tower
- Inserts protect aluminum wheels
- Dual clamping cylinders
- Adjustable bead breaker

Power requirements	110 VAC, 50/60 Hz, 1 ph
Inside clamping range	13" - 28"
Outside clamping range	10" - 26"
Max. tire outside	1,200 mm (47")
Max. tire width	380 mm (15")
Bead breaker force	5,500 lbs (2,517 Kg)
Operating pressure	10 bar (145 psi)
Shipping weight	630 lbs (285 Kg)

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES

- 4" EXTENSION CLAMPS - 9214081
- BEAD PRESSING TOOL - 9208633
- MOTORCYCLE CLAMPS - 9235082

- NYLON MOUNTING HEAD KIT - 2008402
- QUICK UNION KIT - 9208996
- WHEEL LIFT - 9213170

CEMB[®] USA

CEMB[®] USA - BL Systems Inc.
 2873 Ramsey Road, Gainesville GA 30501 - USA
 Phone +1 (678) 717-1050 - sales@cemb-usa.com
 www.cemb-usa.com

DISTRIBUTED BY