

# SM825



## SWING ARM TIRE CHANGER



### SM825 TIRE CHANGER

Entry level, very sturdy machine  
with minimum overall dimensions

# CEMB<sup>®</sup> USA

# SM825

■ Clamping of rims from 13" to 26"

■ PRESS ARM (optional) for low profile tires

■ Inflators on each clamp


■ Dual clamping cylinders

■ Semi-automatic SWING ARM

■ Air tank in tower

■ Inserts protect aluminum wheels

■ Adjustable bead breaker

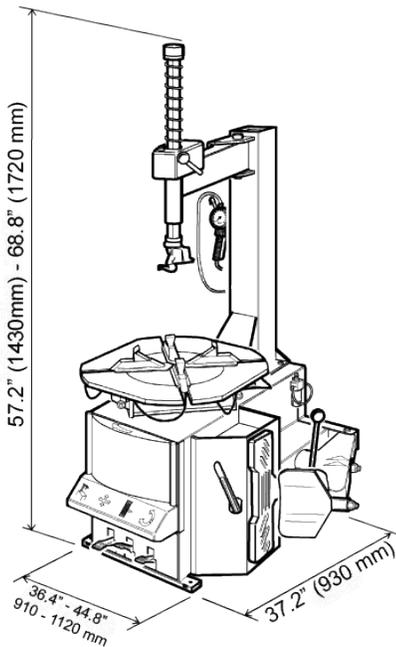

Power requirements	110 VAC, 50/60 Hz, 1 ph
Inside clamping range	15" - 26"
Outside clamping range	13" - 24"
Max. tire outside	1,200 mm (47")
Max. tire width	380 mm (15")
Bead breaker force	5,500 lbs (2,517 Kg)
Operating pressure	10 bar (145 psi)
Shipping weight	630 lbs (285 Kg)

## STANDARD ACCESSORIES



## OPTIONAL ACCESSORIES

4" EXTENSION CLAMPS - 9214081  
 BEAD PRESSING TOOL - 9208633  
 MOTORCYCLE CLAMPS - 9235082

NYLON MOUNTING HEAD KIT - 2008402  
 QUICK UNION KIT - 9208996  
 WHEEL LIFT - 9213170

## CEMB<sup>®</sup> USA

CEMB<sup>®</sup> USA - BL Systems Inc.  
 2873 Ramsey Road, Gainesville GA 30501 - USA  
 Phone +1 (678) 717-1050 - sales@cemb-usa.com  
 www.cemb-usa.com

DISTRIBUTED BY