

PDO200A



- Guaranteed 99.999% liquid water removal
- Dimensions: H253 x W68 ⌀
- Flow rate up to 8.8 cfm
- Particulate removal to 1 micron
- **5 year guarantee**



PDO600A



- Guaranteed 99.999% liquid water removal
- Dimensions: H353 x W102 ⌀
- Flow rate up to 35.3 cfm
- Particulate removal to 1 micron
- **5 year guarantee**



PDO60S



- 99.999% liquid water removal
- Stainless Grade 304
- Dimensions: H230mm x W34mm ⌀
- Flow rate up to 3.2 cfm
- Particle removal 1 micron
- No replacement filter element
- **5 year guarantee**



PDO300S



- 99.999% liquid water removal
- Stainless Grade 304
- Dimensions: H230mm x W60.5mm ⌀
- Flow rate up to 16 cfm
- Particle removal 1 micron
- No replacement filter element
- **5 year guarantee**



PDO600S



- 99.999% liquid water removal
- Stainless Grade 304
- Dimensions: H270mm x W60.5mm ⌀
- Flow rate up to 32 cfm
- Particle removal 1 micron
- No replacement filter element
- **5 year guarantee**



PDO900S




- 99.999% liquid water removal
- Stainless Grade 304
- Dimensions: H310mm x W60.5mm ⌀
- Flow rate up to 48 cfm
- Particle removal 1 micron
- No replacement filter element
- **5 year guarantee**



PDO1500S




- 99.999% liquid water removal
- Stainless Grade 304
- Dimensions: H401mm x W89mm ⌀
- Flow rate up to 82 cfm
- Particle removal 1 micron
- No replacement filter element
- **5 year guarantee**




PDO2000S



- 99.999% liquid water removal
- Stainless Grade 304
- Dimensions: H465mm x W89mm ⌀
- Flow rate up to 109 cfm
- Particle removal 1 micron
- No replacement filter element
- **5 year guarantee**




PDO4000T

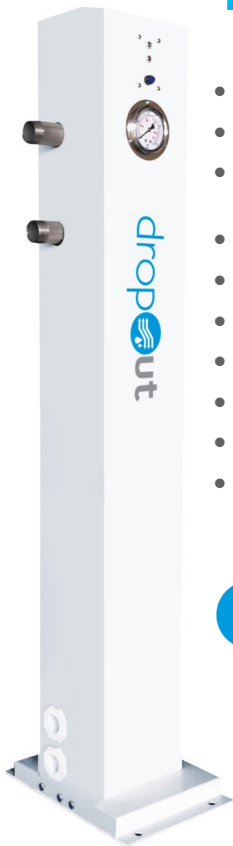

- 99.999% liquid water removal
- Mild steel-powder coated RAL 9016
- Dimensions: H1200 mm x W220 mm x D155 mm
- Flow Rate up to 254 cfm
- Particle removal 3 micron
- No replacement filter element
- Fitted with pressure gauge
- Auto drain
- AC mains powered
- **5 year guarantee**



PDO8000T

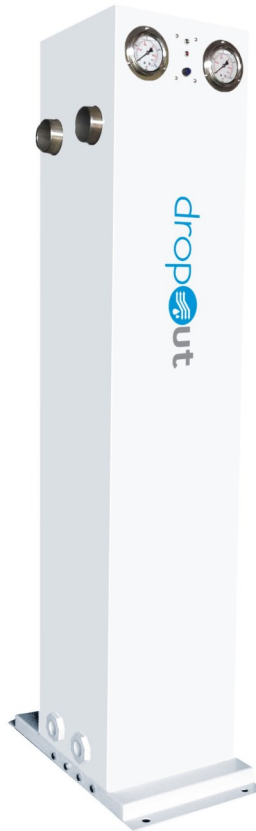

- 99.999% liquid water removal
- Mild steel-powder coated RAL 9016
- Dimensions: H1350 mm x W280 mm x D500mm
- Flow Rate up to 500 cfm
- Particle removal 3 micron
- No replacement filter element
- Fitted with pressure gauge
- Auto drain
- AC mains powered
- **5 year guarantee**



Liquid water removal guaranteed

ICON KEY

1-15
bar
Operating
Pressure

1/4"
Inlet / Outlet
Connection

80
cc
Water
Storage

min
-5°C
Min Operating
Temperature

max
80°C
Max Operating
Temperature

22.5kg
Weight

Product Code	Flow Rate		Water Storage (cc)	Inlet/Outlet connection (BSPT)	Drain Connection (manual BSPT)	Product Dimensions (mm)	Weight (kg)	Particulate removal (micron)
	(cfm)	(L/min)						
PDO200A	0.04 - 8.8	1 - 250	200	1/2"	1/4" (m)	235 x 68	0.69	1
PDO600A	0.04 - 35.3	1 - 1000	500	1"	1/2" (m)	353 x 102	2.22	1
PDO60S	0.04 - 3.2	1 - 90	80	1/4"	1/2" (m)	230 x 34	0.51	1
PDO300S	0.04 - 15.9	1 - 450	270	3/4"	1/2" (m)	230 x 60.5	1.49	1
PDO600S	0.04 - 31.8	1 - 900	280	3/4"	1/2" (m)	270 x 60.5	1.93	1
PDO900S	0.04 - 47.7	1 - 1350	290	3/4"	1/2" (m)	310 x 60.5	2.08	1
PDO1500S	0.04 - 81.7	1 - 2314	450	1"	1/2" (m)	401 x 89	4.18	1
PDO2000S	0.04 - 108.9	1 - 3085	470	1"	1/2" (m)	465 x 89	4.52	1
PDO4000T	0.04 - 254.3	1 - 7200	600	1"	Automatic	1200 (H) x 220 (W) x 155 (D)	22.5	3
PDO8000T	0.04 - 501.5	1 - 14200	110	2"	Automatic	1350 (H) x 280 (W) x 500 (D)	43.2	3