



Innovative Cleaning Systems
www.tornadovac.com

C L E A N - A I R G L A Z E R™ 2 5 0 0 B




2 5 0 0 B

2 5 0 0 B W/T R A C T I O N D R I V E

CLEAN-AIR GLAZER™ 2500 B

The ultimate in high-speed burnishers, clean-air performance, durable, easy to use, and long-lasting

2500 rpm of burnishing speed. Rugged roto-molded housing. Adjustable pad pressure. A high-strength steel linkage mounted with a 2.5 HP motor. All this and more make Tornado's 2500 B Series the industry's premiere burnishing machines. Simple to use and even easier to maintain, the 2500 B far outperforms the competition's comparable units. Available with an optional maintenance-free, sealed traction-drive model. The sloped battery housing is designed with operator sight-lines in mind, allowing an unobstructed view of approaching obstacles. Safety switches prevent operation when the cover housing is removed or the pad holder raised. The units come complete with batteries, charger, and 20" pad holder. Best yet, the 2500 B is a "Clean-Air" machine. Twin filters allow virtually dust-free burnishing, a significant factor when operating in sensitive environments such as schools, healthcare facilities, and retail stores. The filters are easily removable for washing and replacement as the need arises.

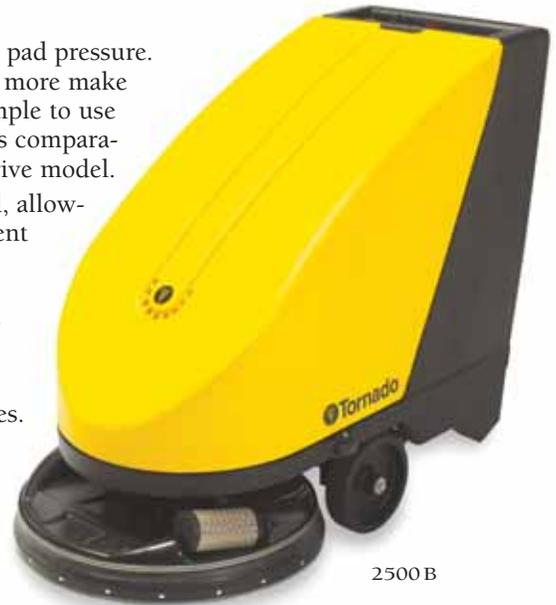

2500 B



Clean-Air filtration
The 2500 B has a clean-air filtering system that allows dust free operation, an important consideration when working in an area with IAQ (indoor air quality) concerns.

A complete package
The unit comes standard with batteries, charger, and pad holder.

Smart design
The unit's sleek profile and contoured housing provide optimal sight lines for safe operation and an unobstructed view of the burnishing path.

Convenient
The double-walled, roto-molded battery cover housing is durable and easy to remove for battery maintenance.



Ease of use
The 2500 B tips back and rests on a specially-designed rear bumper. This permits easy pad holder access, pad replacement, and filter maintenance.



Easy operation
Speed and direction can be changed during operation via an easy-to-use, dual-function control knob.



PRODUCT SPECIFICATIONS

MODEL	CATALOG NUMBER	PAD SIZE	GLAZING SPEED	PAD PRESSURE	DRIVE POWER
2500 B	98498	20"	2500 rpm	Adj. to 30 LBS	N/A
2500 B W/TRACTION DRIVE	98499	20"	2500 rpm	Adj. to 30 LBS	.5 HP

PRODUCT SPECIFICATIONS (CONTINUED)

MODEL	P.M. MOTOR	SIZE (L X W X H)	WEIGHT W/BATTERIES AND CHARGER	TRACTION DRIVE	DIGITAL CONTROLS
2500 B	2.5 HP / 36V	48" X 22" X 37"	565 LBS	N/A	N/A
2500 B W/TRACTION DRIVE	2.5 HP / 36V	48" X 22" X 37"	585 LBS	Standard	Standard

REPLACEMENT PARTS AND ACCESSORIES

MODEL	36V AUTOMATIC CHARGER	12V BATTERY (3 REQUIRED)	REPLACEMENT FILTER (2 REQUIRED)	DUST-SKIRT SHROUD ASSEMBLY	PAD RETAINER
2500 B	99515	99512	90689	19383	90599
2500 B W/TRACTION DRIVE	99515	99512	90689	19383	90599



Tornado Industries • 7401 W. Lawrence Ave., Chicago, IL 60706 • 1-800-VACUUMS or (708) 867-5100 Fax: (708) 867-6968
Visit our web site at: www.tornadovac.com